

# SX60LS 3.0

## Thermal Scope



HIKMICRO STELLAR SX60LS 3.0 Thermal Scope is equipped with the latest 50 Hz 1280 × 1024 @12 μm thermal detector, offering much smoother image display. With much higher sensitivity (NETD < 15 mK) and the latest image processing algorithm (Image Pro 3.0), users can catch the finest details no matter the weather or light conditions without interruption. With a 2560 × 2560 1.03"OLED larger display, SX60LS 3.0 makes it easier to spot targets quickly and accurately. The built-in lens 1000 m LRF and ballistic calculation contribute to more accurate shooting. The scope is mainly used for field and forest hunting.

## Key Feature

- 1280 × 1024 resolution @12 μm 50 Hz thermal detector
- High sensitivity thermal module NETD < 15 mK (@25°C, F# = 1.0)
- 60 mm, F1.0 lens with detection range up to 3100 m
- 2560 × 2560 resolution 1.03-inch OLED display
- Built-in lens laser rangefinder up to 1000 m, with ballistic calculation
- Rechargeable internal batteries and external battery, 6.5 h continuous operation
- High shock resistance up to 1000 g/0.4 ms

## • Specification


Thermal Module	
Image Sensor	VOx Uncooled Focal Plane Arrays
Max. Resolution	1280 × 1024
Frame Rate	50 Hz
Pixel Interval	12 μm
Response Waveband	8 μm to 14 μm
NETD	Less than 15 mK (@25°C), F#=1.0
Lens (Focal Length)	60 mm, F1.0
Focus Mode	Focus Ring
Detection Range	3100 m
Min. Focusing Distance	6 m
Magnification	2.5×-28.5× Support 1 × step value of continuous zooming
Field of View(H × V), Degrees / m @100m	14.6° × 11.7°/25.6 m × 20.5 m
Image Display	
Display	2560 × 2560, 1.03 inch OLED
FFC (Flat Field Correction) Mode	Auto, Manual, External Correction
Palettes	Black Hot, White Hot, Red Hot, Fusion, Red Monochrome, Green Monochrome
Exit Pupil	6 mm
Eye Relief	45 mm
Diopter (Range)	-4D to 4D
Brightness Adjustment	Yes
Tone Adjustment	Cold, Warm
Contrast Adjustment	Yes
HSIS (HIKMICRO Shutterless Image System)	No
Zoom Pro	No
Image Pro 3.0	Yes
Sync Pro	Yes
System	
Record Video	On-board Video Recording
Audio Recording	Yes
Capture Snapshot	Yes
Recoil-activation Recording	Yes
Storage	Built-in EMMC (64 GB)
PIP	Yes
Hotspot	Yes

Hot Track	Yes
Distance Measurement	Yes
Zeroing Profiles	5
Freeze Zeroing	Yes
Max. Recoil	1000 g/0.4 ms
Standby Mode	Yes
Ballistic Calculation	Yes
Local Album	Yes
<b>Power Supply</b>	
Battery Type	Two rechargeable Lithium batteries (internal), one replaceable and rechargeable 18650 battery (external)
Battery Operating Time	6.5 hours continuous running (@25°C, LRF on)
Type-C Power Supply	5 V DC/2 A, USB Type-C interface, Supports QC3.0 * Only the built-in battery will be charged via the type-C cable. Use the battery charger to charge the external battery.
<b>General</b>	
Mounting	Standard 30 mm
Dimension	452.6 mm × 94.3 mm × 78.9 mm
Weight	1150 g
Working Temperature	-30°C to 55°C (-22°F to 131°F)
Protection Level	IP67
Center Height	41 mm
<b>Laser Rangefinder</b>	
LRF Module in Lens	Yes
Wavelength	905 nm
Safety Class for Laser	Class 1
Max. Measuring Range	1000 m
Measurement Accuracy	±1 m
Min. Measuring Range	10 m

## • Available Model


HM-TR8C-60S2G/WL-SX60LS 3.0

## • Dimension

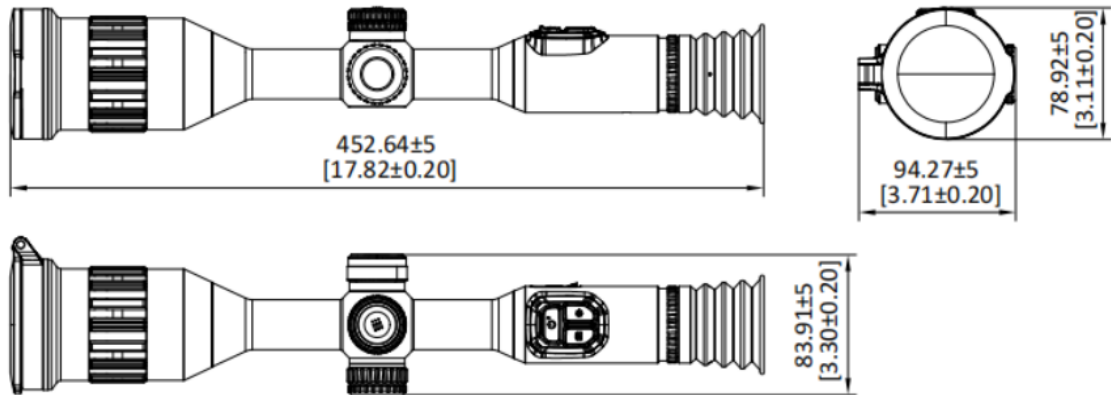

Unit: mm [Inch]

## • Accessories

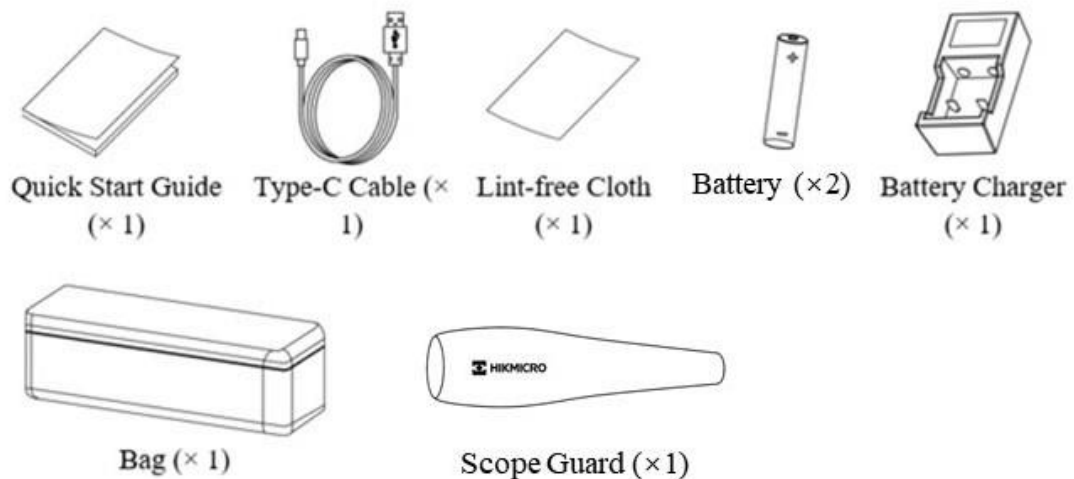

**COMPLIANCE NOTICE:** The thermal series products might be subject to export controls in various countries or regions, including without limitation, the United States, European Union, United Kingdom and/or other member countries of the Wassenaar Arrangement. Please consult your professional legal or compliance expert or local government authorities for any necessary export license requirements if you intend to transfer, export, re-export the thermal series products between different countries.



Hikmicro Hunting.Global   HIKMICRO Outdoor   [www.hikmicrotech.com](http://www.hikmicrotech.com)   [hikmicro\\_hunting\\_global](https://www.instagram.com/hikmicro_hunting_global)   HIKMICRO   [info@hikmicrotech.com](mailto:info@hikmicrotech.com)

Room 313, Unit B, Building 2, 399 Danfeng Road, Xixing Subdistrict, Binjiang District, Hangzhou, Zhejiang  
© Hangzhou Microimage Software Co., Ltd. All rights reserved. | Data subject to change without notice!