

## E02 Eco Series Handheld Thermal Camera



The handheld thermal camera is based on the thermal technology, specially designed for the needs of temperature measuring applications. People can quickly troubleshoot faults on-site.

### ▪ Features

- Thermal resolution: 96 x 96 (9,216 pixels)
- 112:1 Distance to spot ratio (D:S)
- SuperIR: 240 x 240 (57,600 pixels)
- NETD : < 50mK (@ 25 °C,F#=1.0)
- Measurement presets: center spot, hot spot, cold spot, off
- 20 Hz image frequency
- Laser pointer
- Built-in 4 GB flash memory: 30,000 pictures
- Up to 8 hours continuous running
- Thermal/Visual/Fusion


## ▪ Specification

Infrared Image	
IR Resolution	96 × 96 (9,216 pixels)
SuperIR	240 x 240 (57,600 pixels)
Distance to Spot Ratio (D:S)	112:1
NETD	< 50 mK (@ 25 °C, F#=1.0)
Image Frequency	20 Hz
Detector Pitch	12 μm
Spectral Range	7.5 to 14 μm
Focal Length	1.35 mm
F-number	F1.0
Field of View (FOV)	50° × 50°
Spatial Resolution (IFOV)	8.89 mrad
Min. Focus Distance	0.1m (0.33 ft)
Focus Mode	Focus Free
Image Display	
Display	240 × 320 Resolution, 2.4" LCD Screen
Image Modes	Thermal/Visual/Fusion
Color Palettes	White Hot, Black Hot, Rainbow, Ironbow
Screen Brightness	Manual
Visual Camera	640× 480 (0.3 MP)
Measurement and Analysis	
SuperScene Mode	Custom, Water Leak, Insulation, Floor Heating, Electrical Faults, Solar Panel
Smart SuperScene Alarm	Water Leak, Insulation, Floor Heating
Alarm	More than, Less than
Alarm Linkage	Alarm Mode Palettes
Temperature Measurement Mode	Thermometer Mode, Measurements Presets (Center Spot, Max Spot, Min Spot, Off)
Object Temperature Range	-20°C to 400°C (-4°F to 752°F)
Accuracy	Max (±2°C/3.6°F, ±2%) at ambient temperature 25°C (77°F) and object temperature above 0°C (32°F)
Level and Span Mode	Auto/Manual
Data Storage and Communication	
Storage Media	Built-in 4 GB eMMC(user available storage space is less than the nominal capacity)
Image Storage Capacity	Max 17,000 Images
Image File Format	Radiometric JPEG
Video Storage Capacity	MP4 Approx. 11 h
Video File Format	MP4
Radiometric Infrared-Video Streaming (Compressed)	Over UVC

General	
USB Interface	USB Type-C
Laser	Yes, Class II
Battery Type	Rechargeable Li-ion Battery
Battery Operating Time	Approx. 8 hours
Battery Charging Time	Approx. 3 hours fully charged (Adapter Output: 5 V 2 A)
Protection Level	IP54
Drop Test Height	2 m (6.56 ft)
Working Temperature Range	-10°C to 50°C (14°F to 122°F)
Storage Temperature Range	-40°C to 70°C (-40°F to 158°F)
Relative Humidity	< 95% non-condensing
Weight	Approx. 290 g (0.64 lb)
Dimension	196 × 117 × 59 mm (7.7 × 4.6 × 2.3 in)
Tripod Mounting	UNC ¼" -20
Power Supply	USB-C (5V/2A)

## ▪ Dimension


### Dimensions

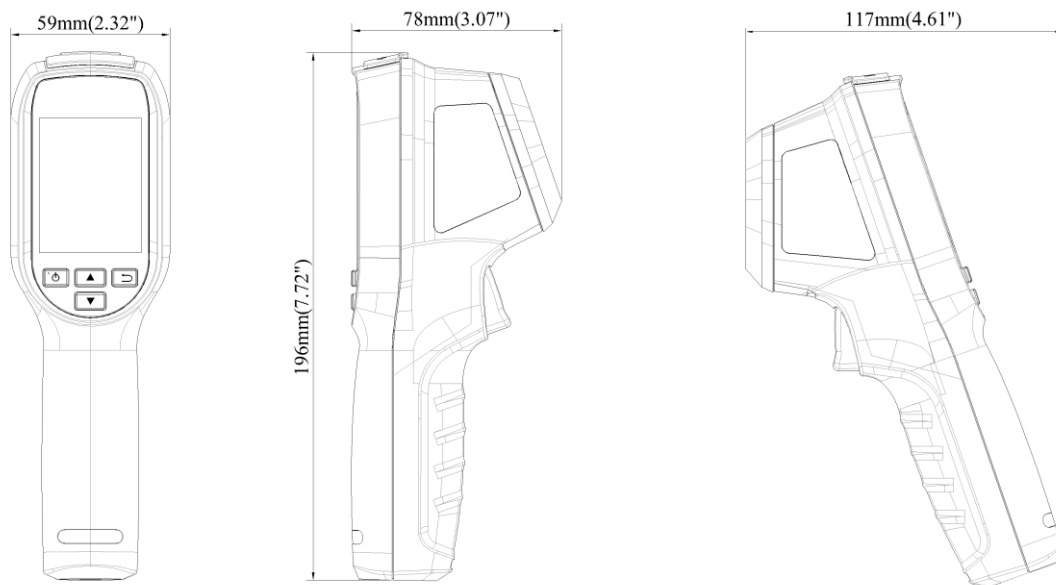

## ▪ Packaging List



Camera (× 1)



USB 2.0 A to USB Type-C Cable  
(× 1)




Wrist Strap (× 1)



Calibration Certificate (× 1)



HIKMICRO Card (× 1)



QSG (× 1)

## ▪ Accessory

### ▪ Optional

HM-B01-POUCH  
POUCH



**COMPLIANCE NOTICE:** The thermal series products might be subject to export controls in various countries or regions, including without limitation, the United States, European Union, United Kingdom and/or other member countries of the Wassenaar Arrangement. Please consult your professional legal or compliance expert or local government authorities for any necessary export license requirements if you intend to transfer, export, re-export the thermal series products between different countries.



 Hikmicro Industrial

 hikmicro\_industrial

 HIKMICRO Industrial

 HIKMICRO

 info@hikmicrotech.com

 www.hikmicrotech.com

© Hangzhou Microimage Software Co., Ltd. All Rights Reserved.

\*Note: Specifications are subject to change without notice. For the current specs,  
please go to [www.hikmicrotech.com](http://www.hikmicrotech.com)