



HIKMICRO

PS220 Pyrometer



▪ Features

- Temperature measurement range: 150°C~1600°C(302°F~2912°F)
- Accuracy: up to $\pm (0.3\% \cdot T_{mea} + 2)^\circ\text{C}$ or $\pm (0.3\% \cdot T_{mea} + 3.6)^\circ\text{F}$, T_{mea} means "Current measured temperature"
- Resolution: 0.1°C/0.18°F
- Repeatability: up to $\pm (0.1\% \cdot T_{mea} + 1)^\circ\text{C}$ or $\pm (0.1\% \cdot T_{mea} + 1.8)^\circ\text{F}$, T_{mea} means "Current measured temperature"
- Optical Resolution (D:S): 100:1(90% energy)
- Spot Size: 3mm
- Focus Range: 0.3m~INF
- Protection Level: IP66
- Sighting: Visual display

▪ Specification


Measurement Specifications	
Spectral Response	1.45 ~ 2.2μm
Temperature Range	150°C~1600°C(302°F~2912°F)
Accuracy	250-1600°C: $\pm (0.3\% \cdot T_{mea} + 2) ^\circ\text{C}$ / 482-2912°F: $\pm (0.3\% \cdot T_{mea} + 3.6) ^\circ\text{F}$, 150-250°C: $\pm (1\% \cdot T_{mea} + 2) ^\circ\text{C}$ / 302-482°F: $\pm (1\% \cdot T_{mea} + 3.6) ^\circ\text{F}$ *At ambient temperature 23 $\pm$ 5°C * $\epsilon=1$; response time 100 ms; no attenuation *Tmea means "Current measured temperature"
Resolution	0.1°C/0.18°F
Repeatability	250-1600°C: $\pm (0.1\% \cdot T_{mea} + 1) ^\circ\text{C}$ / 482-2912°F: $\pm (0.1\% \cdot T_{mea} + 1.8) ^\circ\text{F}$, 150-250°C: $\pm (1\% \cdot T_{mea} + 1) ^\circ\text{C}$ / 302-482°F: $\pm (1\% \cdot T_{mea} + 1.8) ^\circ\text{F}$ *At ambient temperature 23 $\pm$ 5°C * $\epsilon=1$; response time 100 ms; no attenuation *Tmea means "Current measured temperature"
Optical Resolution (D:S)	100:1 (90% energy)
Spot Size	3mm
Response Time	10ms
Emissivity	0.100 ~ 1.100
Sighting	Visual display
Signal Processing	Averaging mode, temperature filter mode, peak/valley hold mode
Focus Range	0.3m~INF
Visual	
Field of View (FOV)	7° x 5.5°
Optical Resolution	1728*1296
Data Communication	
Analog Output	Supports proportional output, 16-bit resolution, max load 600Ω - Interface: 4-20mA - Output Types: 4-20mA/0-20mA
Digital Output	RS485, Modbus RTU, Modbus TCP, I/O
Alarm Output	Support temperature alarm, ambient temperature alarm, dirt alarm, FSMC alarm, 4-20mA alarm, relay alarm, I/O alarm
Protocols	TCP/IP
General	
Power Supply	DC 10~30V
Power Consumption	Max 5W
Display	OLCD screen, resolution 128*32
Laser	No
Protection Level	IP66
Working Temperature Range	- Without cooling: 0°C to +65°C (32°F to +149°F) - With air & water cooling accessories: 0°C to +300°C (32°F to +572°F)

Storage Temperature Range	-20°C to 70°C (-4°F to +158°F)
Relative Humidity	< 95% non-condensing
Vibration	1 g, IEC 60068-2-6
Shock	15 g, IEC 60068-2-27
Dimension	φ52.4 x 148.7mm (φ2.06 x 5.85in)
Weight	680g(1.5 lb)
Warranty	5 years for the full product


▪ Available Model

HM-P20S22-1516-F4/V


▪ Dimension

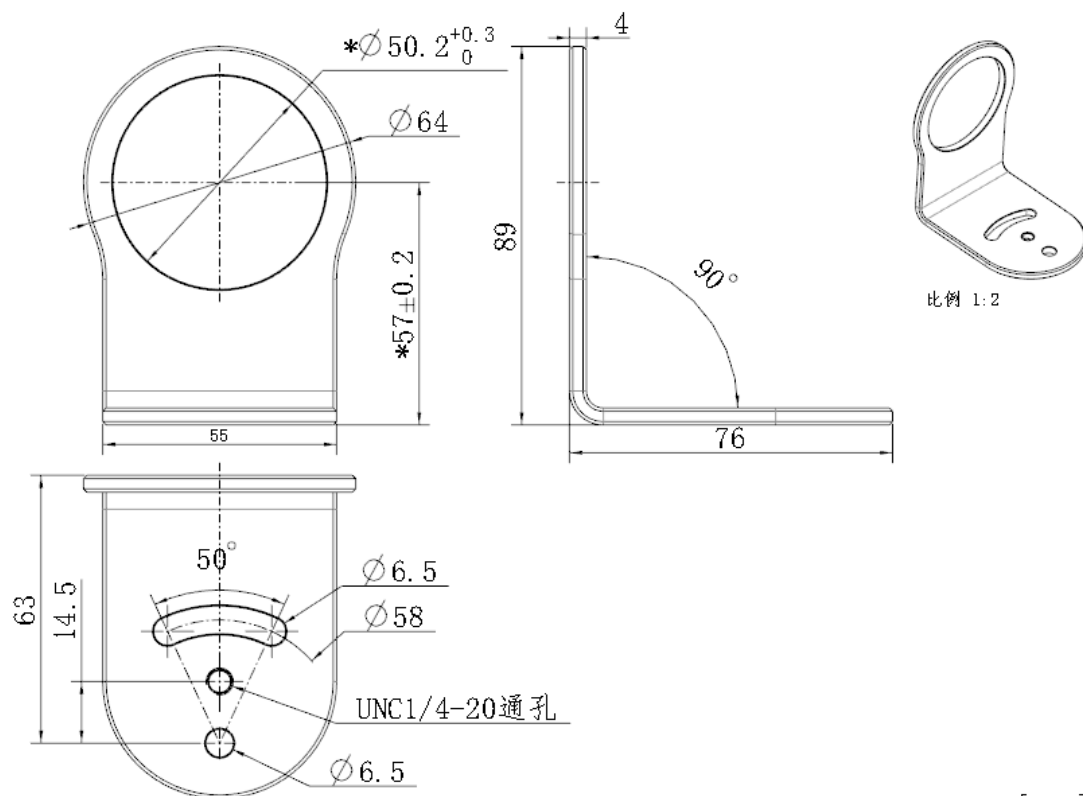



Unit:mm [Inch]




比例 1:2

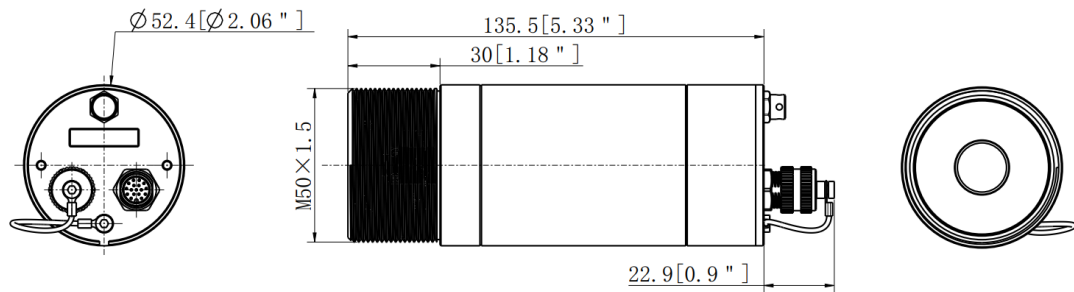

Unit:mm[Inch]

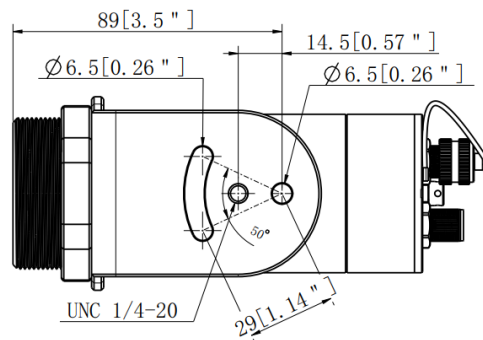

比例 1:2

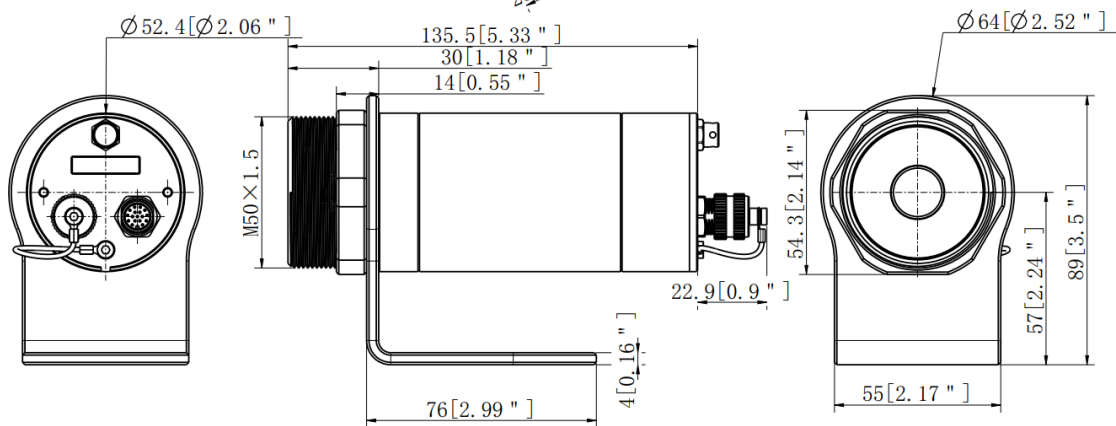

Unit:mm[Inch]

