



Thermal Monocular
HIKMICRO LYNX Series (V5.5.52build220826)
Release Notes

TABLE OF CONTENTS

Chapter 1 Introduction	1
Chapter 2 Optimizations.....	2
1.1 Image Adjustment.....	2
1.2 Unit Settings.....	2
1.3 Upgrade Prompts	2

Chapter 1 Introduction

HIKMICRO LYNX series thermal monocular is equipped with high-sensitivity IR detector, and adopts advanced thermal imaging technology, to get clear view in poor visibility or dark environment.

It helps to view the target and measure the distance. It can aim at the moving target and meet the outdoor condition. The device can be widely used in searching and rescuing, hiking, travel, etc.

This document introduces new features and optimizations in V5.5.52 of the products.

Version Information

Item	Description
Firmware Version	V5.5.52build220826
Models	HM-TS01-06XF/W-LC06 HM-TS03-15XF/W-L15
Mobile Client	HIKMICRO Sight, latest version

Chapter 2 Optimizations

HIKMICRO LYNX series thermal monocular has been optimized to improve your experience.

1.1 Image Adjustment

The adjustable brightness and contrast are increased from 5 levels to 10 levels. The default brightness and contrast are level 5.


1.2 Unit Settings

Meter (m) and yard are supported in V5.5.52.

1.3 Upgrade Prompts

The FPGA upgrades automatically after the main firmware is upgraded. The upgrade prompts are optimized.

- Prompt of upgrading FPGA: Upgrading firmware...Please wait for about 10 min. The device will reboot automatically after upgrade.

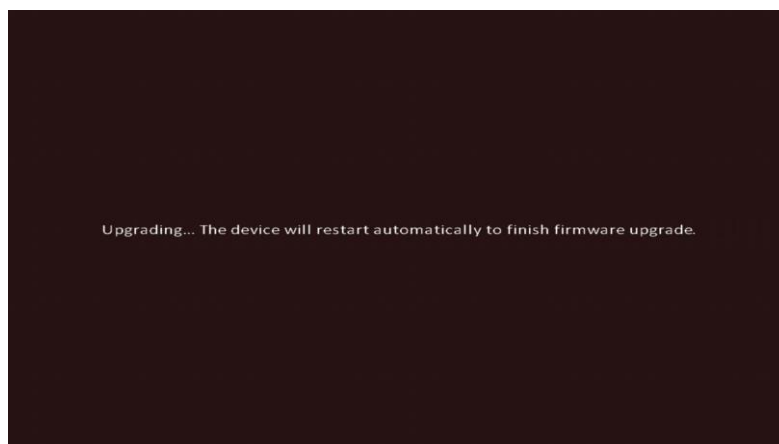

This function is NOT supported by HM-TS01-06XF/W-LC06.



HIKMICRO

See the World in a New Way



Facebook: HIKMICRO Outdoor



Instagram: hikmicro_outdoor



YouTube: HIKMICRO Outdoor



LinkedIn: HIKMICRO