



# HIKMICRO


## Clamp-on Ultrasonic Flow Meter



## Features and Benefits

**Strong measurement stability:** 40db+ SNR index, high echo signal energy under large pipe diameter, stable measurement, strong penetration ability and easy measurement for rusted and scaled pipe sections.

**High applicability to working conditions:** automatic optimization of excitation frequency, selection of the most suitable excitation for pipe wall thickness.

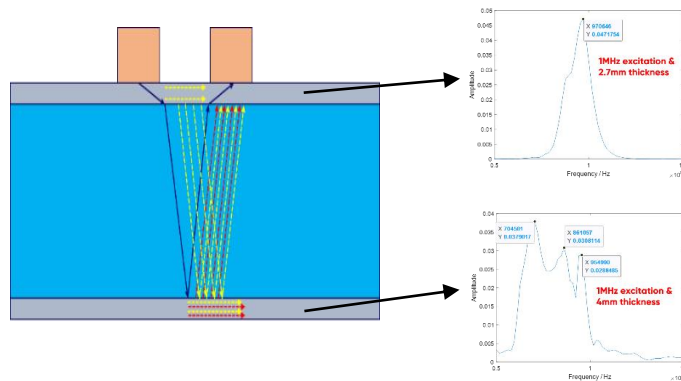

- ◆ High accuracy level, water medium achieves  $\pm 0.5\%$  accuracy at a flow rate of 1m/s~10m/s, and repeatability  $\leq 0.1\%$
- ◆ Simple and safe menu-guided sensor installation method to ensure high-precision measurement results
- ◆ Installed outside the pipeline, no need to interrupt process operation, no pressure loss
- ◆ Supports bidirectional measurement of medium flow direction
- ◆ Supports Bluetooth remote debugging to achieve rapid device configuration, transmitter and sensor binding, sharing of website training materials and operation videos, which improves user operation efficiency and convenience of instrument use
- ◆ Sensor protection level up to IP68
- ◆ Rapid sensor self-test, automatically determine whether the sensor is working properly
- ◆ Automatic evaluation of installation position, automatically recommend installation locations based on signal quality
- ◆ Adaptive signal adjustment with optimized signal transmission strategy, ensuring stable and reliable measurement under various working conditions

# Contents

<b>Contents</b> .....	<b>3</b>
<b>1. Product Introduction</b> .....	<b>4</b>
1.1. Application .....	4
1.2. Measuring Principle .....	4
<b>2. Technical Parameters</b> .....	<b>6</b>
<b>3. Installation Requirements</b> .....	<b>7</b>
<b>4. Mechanical Structure &amp; Dimensional Drawing</b> .....	<b>8</b>
4.1. Sensor .....	8
4.2. Transmitter .....	9
4.3. Bracket .....	10
<b>5. Ordering Information</b> .....	<b>11</b>
5.1. Model Code Description .....	11
5.2. Selection Table .....	13

# 1. Product Introduction

## 1.1. Application

HIKMICRO FU00 series clamp-on ultrasonic flow meter adopts a non-contact measurement method to measure various types of water medium (drinking water, raw water, and sewage). It is not affected by process pressure and medium conductivity. The measurement pipe diameter can cover a maximum of DN3500. It is an economical and efficient flow measurement solution.

## 1.2. Measuring Principle

HIKMICRO clamp-on ultrasonic flowmeter uses Time Difference Method (TOF) to measure flow velocity:

The flight time of the ultrasonic wave (TOF) is related to the flow velocity and sound velocity of the medium in the pipe section. By detecting the flight time, the flow velocity of the medium in the pipe section can be obtained, and finally the flow rate can be measured and calculated.

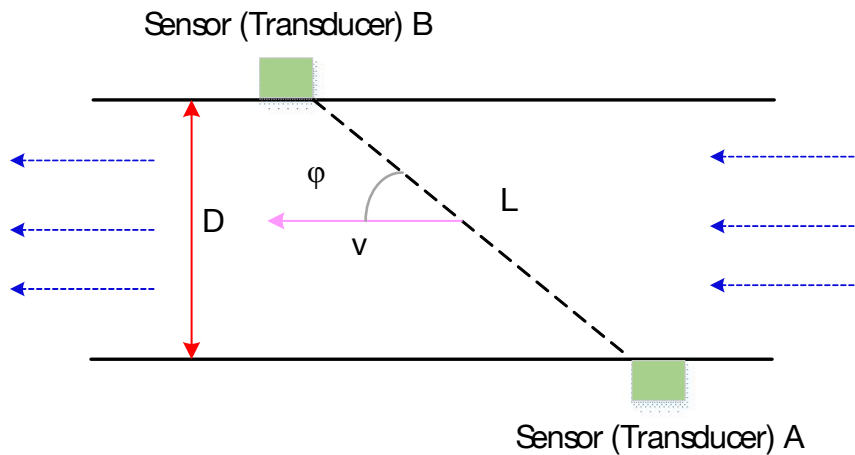


Figure 1. Schematic Diagram of TOF Method

Known:

$L$  = Sound Wave Transmission Length

$D$  = Pipe Diameter

$\varphi$  = Angle between Sound Wave Transmission Path and Pipe

$T_{AB}$  = Sound Wave Flight Time from Sensor A to Sensor B

$T_{BA}$  = Sound Wave Flight Time from Sensor B to Sensor A

Unknown:

$c$  = Sound Velocity in the Medium

$v$  = Liquid Flow Rate in Pipe

Sound Wave Flight Time from Sensor A to Sensor B

$$T_{AB} = \frac{L}{c + v \cos \varphi}$$

Sound Wave Flight Time from Sensor B to Sensor A

$$T_{BA} = \frac{L}{c - v \cos \varphi}$$

Flow Velocity  $v$ :

$$v = \frac{L}{2 \cos \varphi} \left( \frac{1}{T_{AB}} - \frac{1}{T_{BA}} \right) = \frac{L}{2 \cos \varphi} \left( \frac{T_{BA} - T_{AB}}{T_{AB} T_{BA}} \right)$$


## 2. Technical Parameters

Measured Variables	Flow rate, volume flow
Accuracy and Repeatability (1 ~10 m /s )	Accuracy 0.5%, repeatability 0.1%
Power Supply(Power Consumption≤10W)	AC: 85~265VAC, 50± 4Hz DC: 24V DC (12 ~36V DC )
Wire System	Four-wire
Output	4 ~ 20 mA HART Output range: 4 ~ 20 mA (NAMUR standard) Load capacity: 700 Ω Resolution : 0.4μA Mode: Active and Passive
	Pulse / function output Optional settings: <ul style="list-style-type: none"> <li>● Pulse output: Pulse width range 0.05~2,000ms , maximum pulse frequency 10 kHz</li> <li>● Frequency output : Maximum frequency 10 kHz</li> <li>● Function output: Switch value, which can be used to indicate status information, including: diagnostic response, limit value, flow direction check, and status.</li> </ul>
Input	<ul style="list-style-type: none"> <li>● 4 ~ 20 mA input: maximum input voltage ≤ 30V (passive), supports active and passive input.</li> <li>● Switch input: Maximum input value 30V, response time 5 ~200ms configurable. Low level: -3 ~5VDC, High level: 12 ~30VDC</li> </ul>
Temperature Compensation	Manual setting, or optional PT1000
Diagnostic Function	Sound velocity, signal amplitude, signal quality
Measuring Pipe Diameter Range	DN50~DN3500
Fixing Method	The transmitter supports wall-mounted installation and pipe installation The sensor supports fixture installation and clamp installation
Operating Conditions	Ambient temperature range: -40 ~+60 °C Medium temperature range: - 40~+120 °C Medium pressure range: static pressure is higher than saturated steam pressure to avoid medium gasification
Pressure Loss	No pressure loss
Protection Rating	IP67 for Transmitter, IP68 for Sensor


### 3. Installation Requirements

Select the corresponding installation method and installation distance according to the guidance settings.

The opposite installation method should ensure that the fixture is at both ends of the horizontal center of the pipeline

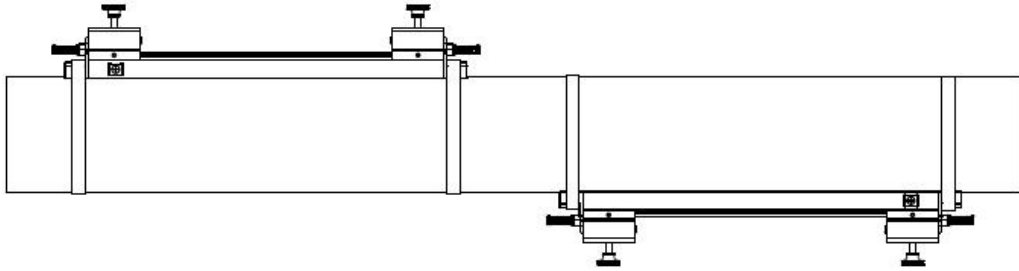

Opposite Side Installation

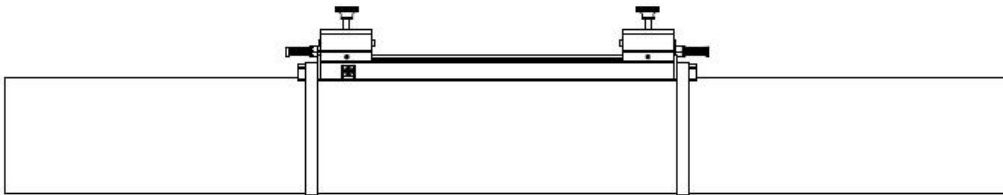


Same Side Installation

## 4. Mechanical Structure & Dimensional Drawing

**Weight:** 2.3 kg

**Dimensions & structural parameters:**

### 4.1. Sensor

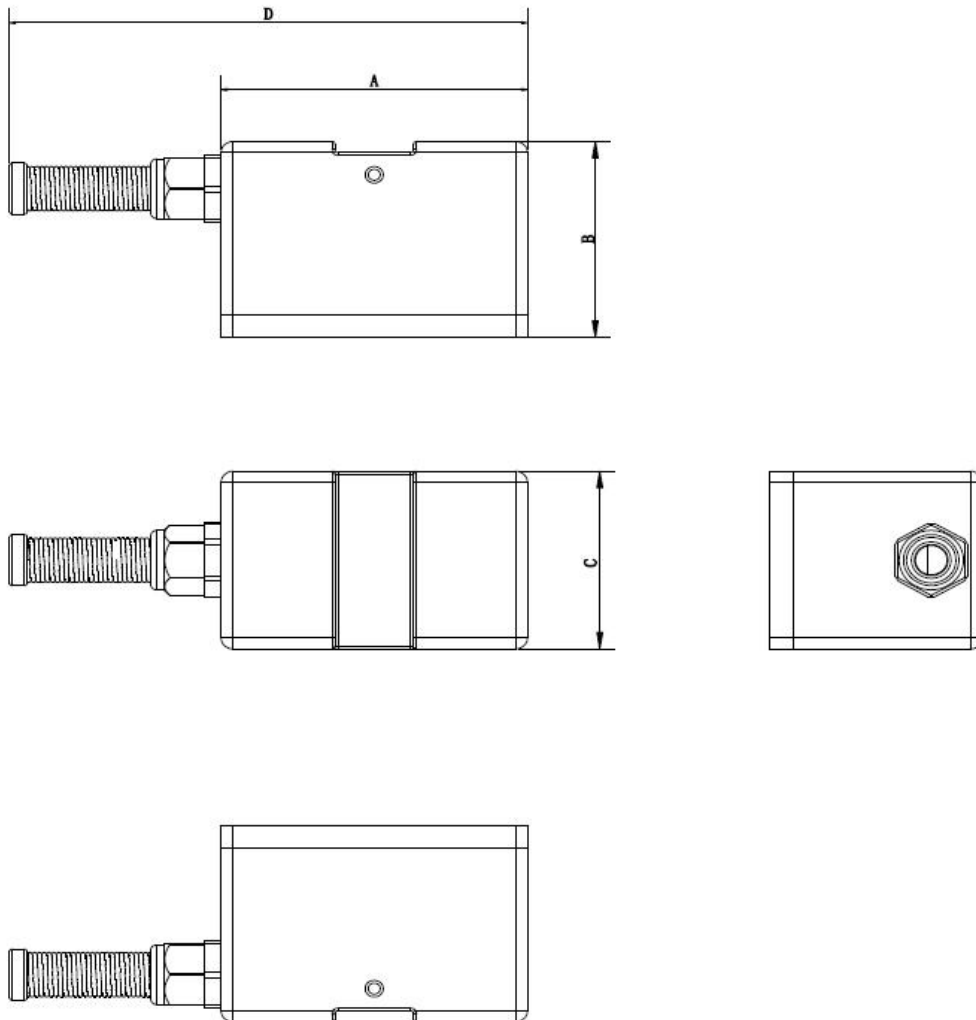


**Material:**

- Sensor body: SUS 316
- Anti-bending metal joint: SUS 316L

**Size:**

Unit	A	B	C	D
mm (inch)	50.8 (2)	35.3 (1.39)	32 (1.26)	88.3 (3.48)

## 4.2. Transmitter

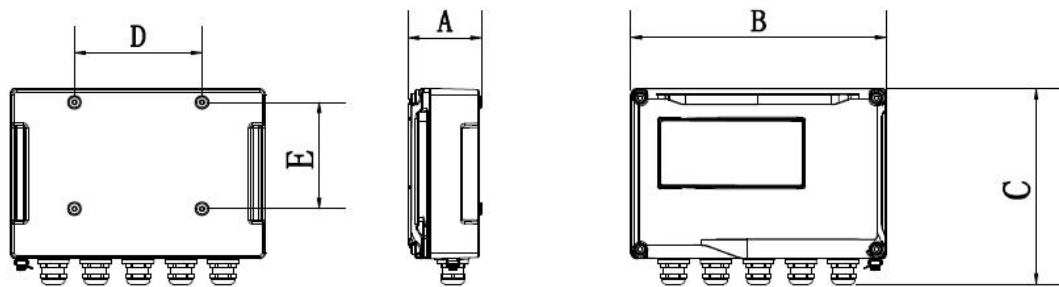


Material:

- Housing: Aluminum Silicon + Magnesium
- Cable gland: Nylon
- Gland seal: EPDM rubber

Size:

Unit	A	B	C	D	E
mm(inch)	66 (2.6)	240 (9.45)	188 (7.4)	120 (4.72)	100 (3.94)

### 4.3. Bracket

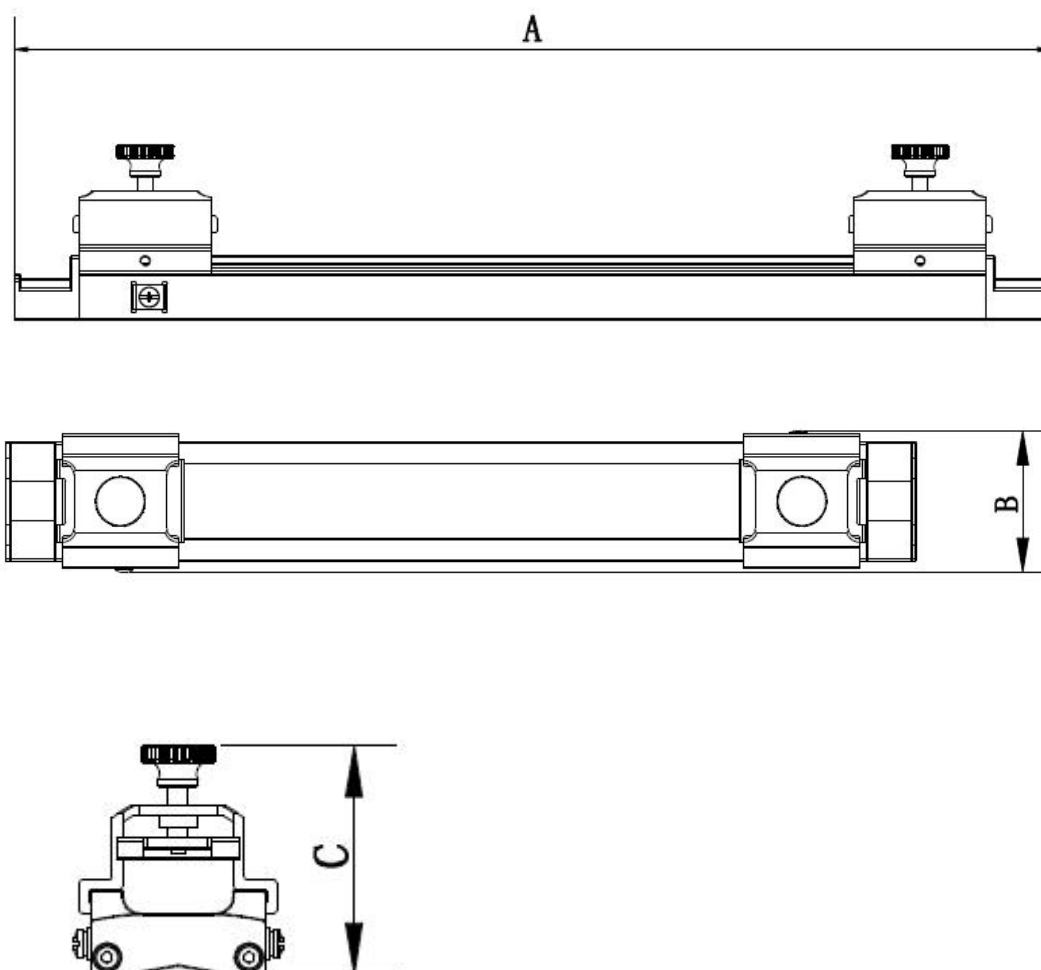

Material:


- Thumb screw: SUS304
- Bracket body: Aluminum Alloy

Size:

Unit	A	B	C
mm(inch)	400 (15.5)	62 (2.44)	67 (2.64)

## 5. Ordering Information

The model code of HIKMICRO Ultrasonic Flow Meter is explained below. Each item from A to R must be specified at the time of ordering.

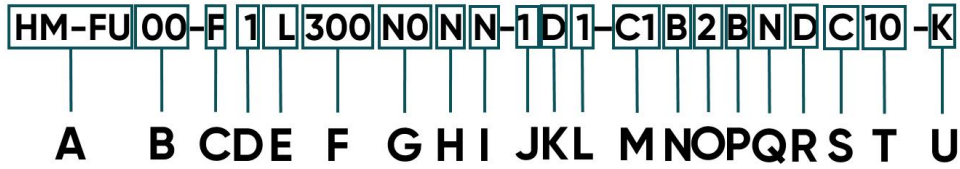

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>A. Base Model-Ultrasonic Flow Meter</li> <li>B. Series</li> <li>C. Accuracy</li> <li>D. Number of Channels</li> <li>E. Medium to be Measured</li> <li>F. Nominal Diameter</li> <li>G. Nominal Pressure</li> <li>H. Process Connection</li> <li>I. Sealing Surface</li> <li>J. Housing</li> <li>K. Power Supply</li> </ul> | <ul style="list-style-type: none"> <li>L. Output Signal</li> <li>M. Sensor Type</li> <li>N. Sensor Frequency</li> <li>O. Temp. Range (Medium)</li> <li>P. Sensor Material</li> <li>Q. Explosion-proof</li> <li>R. Sensor Protection Rating</li> <li>S. Cable Type</li> <li>T. Cable Length</li> <li>U. Installation Method</li> </ul> |
|--|---|

### 5.1. Model Code Description

Model Code Position	Model Code	Description
<b>Base Model- Ultrasonic Flow Meter</b>		
A	HM-FU	Product Category
<b>Series</b>		
B	00	Product Series
<b>Accuracy</b>		
C	F	0.5%
<b>Number of Channels</b>		
D	1	Single Channel
<b>Medium to be Measured</b>		
E	L	Liquid (water, raw water, demineralized water)
<b>Nominal Diameter</b>		
F	300	DN50~DN300
F	600	DN300~DN600
F	122	DN600~DN1200
F	302	DN1200~DN3000

Nominal Pressure		
G	N0	NA
Process Connection		
H	N	NA
Sealing Surface		
I	N	NA
Housing		
J	1	Square housing
Power Supply		
K	S	Adaptive power supply
Output Signal		
L	1	4 ~ 20 mA + pulse + MODBUS
Sensor Type		
M	C1	Standard A series
Sensor Frequency		
N	B	1MHz
Temp. Range (Medium)		
O	2	-40°C~120°C
Sensor Material		
P	B	Stainless steel
Explosion-proof		
Q	N	Non-explosion proof
Sensor Protection Rating		
R	D	IP68
Cable Type		
S	C	Standard cables
Cable Length		
T	10	10m
Installation Method		
U	K	Aluminum clamp + Holder (1 pcs)
U	R	Aluminum clamp + Holder (2 pcs)



## 5.2. Selection Table



# Clamp-on Ultrasonic Flow Meter


X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X					
<b>Series</b> 00 Series 00		<b>Accuracy</b> 0.5% F		<b>Number of Channels</b> Single Channel 1		<b>Medium to be Measured</b> Liquid L (water, raw water, demineralized water)		<b>Nominal Diameter</b> DN50-DN300 300 DN300-DN600 600 DN600-DN1200 122 DN1200-DN3000 302		<b>Nominal Pressure</b> NA NO		<b>Process Connection</b> NA N		<b>Sealing Surface</b> NA N		<b>Housing</b> Square housing 1		<b>Installation Method</b> K: Aluminum clamp + Holder (1 pcs) R: Aluminum clamp + Holder (2 pcs)		<b>Cable Length</b> 10: 10m		<b>Cable Type</b> C: Standard cables		<b>Sensor Protection Rating</b> D: IP68	
<b>Explosion-proof</b> N: Non-explosion proof																									
<b>Sensor Material</b> B Stainless steel																									
<b>Temp. Range (Medium)</b> 2 -40°C-120°C																									
<b>Sensor Frequency</b> B 1MHz																									
<b>Sensor Type</b> C1 Standard A series																									
<b>Output Signal</b> 1 4~20 mA + pulse + MODBUS																									
<b>Power Supply</b> S Adaptive power supply																									

# HIKMICRO

## Clamp-on Ultrasonic Flow Meter

 HIKMICRO Thermography  
 HIKMICRO

 hikmicro\_industrial  
 [www.hikmicrotech.com](http://www.hikmicrotech.com)

 hikmicro\_industrial  
 [info@hikmicrotech.com](mailto:info@hikmicrotech.com)